


Wall mounting case AR400

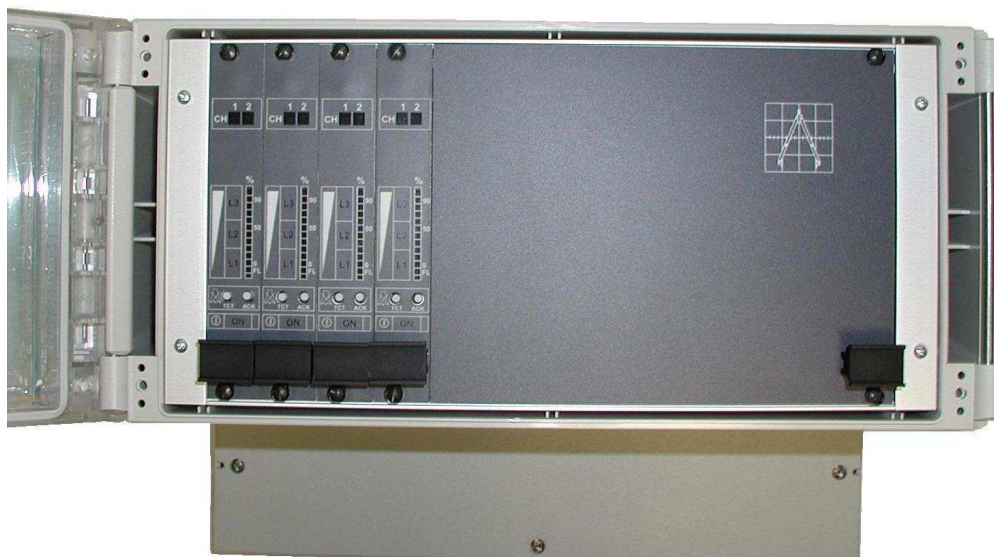

AR400 systems are particularly suitable for small areas or on large sites, where it is preferable to have a number of small self-contained monitoring systems connected by a field bus to a remote Host system.

AR400 systems consists of a full wired box unit for , up to 4 REL/isp modules and 12 ISP alarms outputs with (SPDT) relay and serial line RS-485.

GENERAL SPECIFICATION

12 (SPDT) 3A 110 Vac relays outputs,
configurable even with isp technology
Standard serial line RS-485
Extensive libraries of ready-to-go configuration
available.

Electrical Specification

Supply voltage	110-220 Vac
Supply fuse	1 A
Stabilised power supply output	13.75
Overtoltage protection	± 50V.

Environmental Specification


Storage temperature	-40 to 80 °C
Operating temperature	-10 to 70 °C
Humidity range	90% R.H. n.c.

Mechanical Specification

Overall dimensions	320x240x280 mm
Mounting	3U-49 TE Rack
Cabling	Screw terminals

Part number description

AR-400



OGGIONI s.a.s. Via Lavoratori Autobianchi 1, 20832 Desio (MB) IT.
Tel. +39 0362 629135 Fax. +39 0362 622531 e-mail info@oggionisas.com

website: www.oggionisas.com