


# Wall mounting case AR-1200

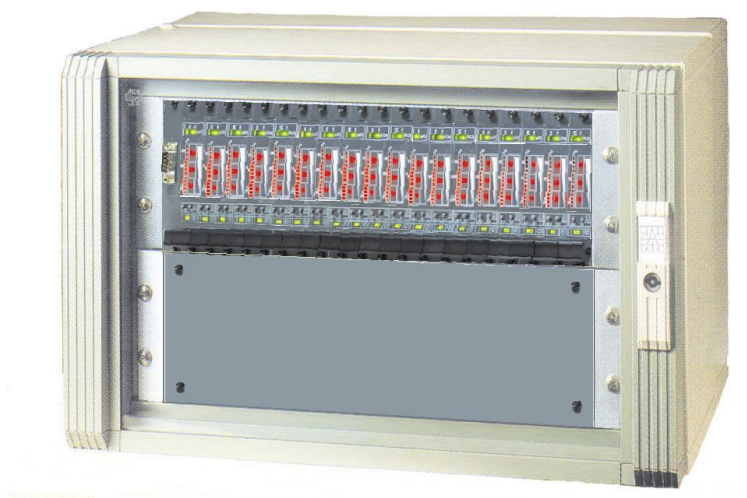

AR1200 is the standard case for max. 16 REL/isp modules, ideal for medium size systems or multiple racks systems. AR1200 systems are particularly suitable for small areas or on large sites, where it is preferable to have a number of small self-contained monitoring systems connected by a field bus to a remote Host system. AR1200 is supplied fully wired, for upto 16 REL/isp modules and 24 ISP alarm outputs with (SPDT) relay rated at 3A 110 Vac.

## GENERAL SPECIFICATION

24 (SPDT) 3A 110 Vac relays outputs,  
configurable even with isp technology  
Standard serial line RS-485  
Extensive libraries of ready-to-go configuration  
for the logic of the alarms.

## Environmental Specification

Storage temperature	-40 to 85 °C
Operating temperature	-10 to 70 °C
Humidity range	90% R.H. n.c.

## Electrical Specification


Supply voltage	110-220 Vac
Supply fuse	1.6 A
Stabilised power supply output	13.75 or 27.5 Vdc
Overvoltage protection	± 50V.

## Mechanical Specification

Overall dimensions	600x345x373 mm
Mounting	3U-HE 19" Rack
Cabling	Screw terminals

## Part number description

AR600



Sede Legale : Via Gariberto da Besana,11 - 20045 Besana in Brianza (MI) IT  
Sede Operativa: Via Lavoratori Autobianchi,1 20033 Desio (Mi) IT  
[www.oggionisas.com](http://www.oggionisas.com) e-mail: [oggionisas@tin.it](mailto:oggionisas@tin.it)



Atex Notified